



#220BT, #280BT, #330BT & #330BT MAG




1. Extend both springs away from the rotating jaws of the trap.

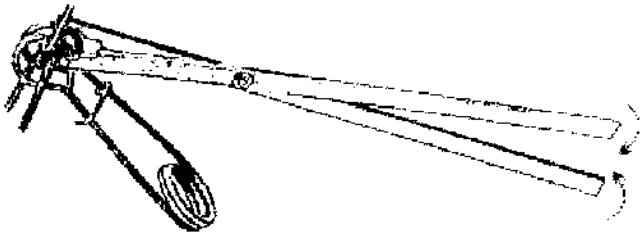


2. Using the Duke set tool, hook notched ends into the spring eyes of one spring. Compress the spring and set safety hook to keep the spring compressed. Repeat step for the opposite spring.

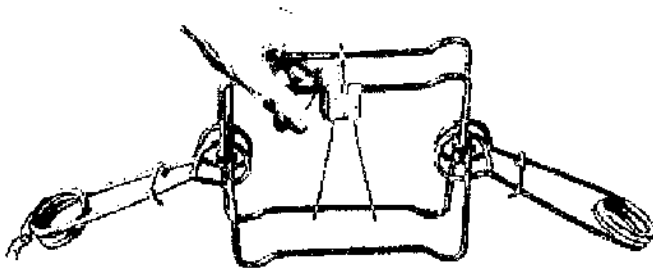

3. While the springs are compressed, bring the trap jaws together.

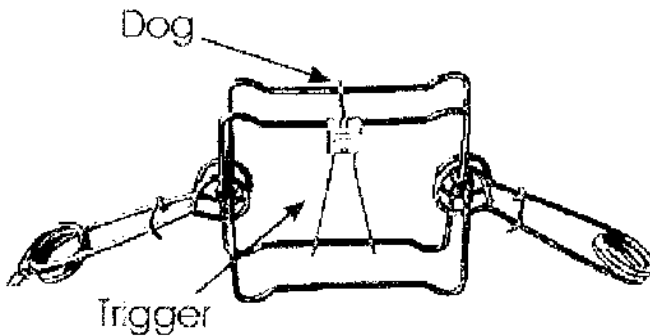

4. Place the dog into the notch of the trigger.

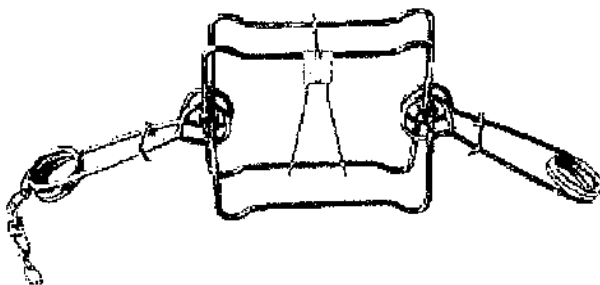

Caution: Trap is now fully set. Ensure that safety hooks remain in place until you leave the set.